


VOYGAR Fibre Patch Cord Single mode LC UPC/LC UPC duplex.

Features

Telecommunications
Data Centres
Test and measurement
10/100/1000 E
10 GE

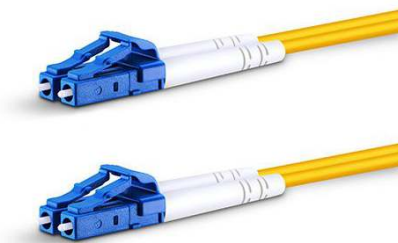

Construction Materials

Fibre Type	SM OS2
Cable Type	Duplex
Fibre's quantity	2
Cable Length	1/3/5/10M
Construction Type	Patch cord
Connector A	LC Duplex
Connector B	LC Duplex
Polish	UPC
Ferrule	Ceramic
Diameter on Sheath	900nm
Cladding Diameter	125nm
Mode Field Diameter	9nm

General Specifications

Cable Sheath Colour	Yellow
Colour, connector A	Blue
Insertion Loss	≤0.2dB
Return Loss	≥50dB
Tensile Strength	100 N

Environmental Specifications

Environmental Space	LSZH
Operating Temperature	-10 °C to +75 °C

Standards

RoHS 2011/65/EU
ISO 9001:2008
IEC 60332-1-1
IEC 61300-3-4
IEC 61300-3-4

Ordering Information

SM22DX01	VOYGAR Fiber Patch Cord Singlemode LC/LC duplex, 1M
SM22DX03	VOYGAR Fiber Patch Cord Singlemode LC/LC duplex, 3M
SM22DX05	VOYGAR Fiber Patch Cord Singlemode LC/LC duplex, 5M
SM22DX10	VOYGAR Fiber Patch Cord Singlemode LC/LC duplex, 10M